

Ammonia-Mediated CO₂ Capture and Direct Electroreduction to Formate

Hengzhou Liu, Yifu Chen, Jungkuk Lee, Shuang Gu, and Wenzhen Li*



Cite This: *ACS Energy Lett.* 2022, 7, 4483–4489



Read Online

ACCESS |



Metrics & More




Article Recommendations





Supporting Information

ABSTRACT: Direct electrochemical conversion of CO₂ capture solutions (instead of gaseous CO₂) to valuable chemicals can circumvent the energy-intensive CO₂ regeneration and pressurization steps, but the performance of such processes is limited by the sluggish release of CO₂ and the use of energy-consuming bipolar membranes (BPMs). Herein, we discovered that an ammonium bicarbonate (NH₄HCO₃)-fed electrolyzer outperforms the state-of-the-art KHCO₃ electrolyzers largely because of its favorable thermal decomposition property, which allows for a 3-fold increase in the *in situ* CO₂ concentration, a maximum 23% increase in formate faradaic efficiency, and a 35% reduction in cell voltage by substituting BPM with an anion exchange membrane (AEM). We then demonstrated an integrated process by combining NH₄HCO₃ electrolysis with CO₂ capture by on-site generated ammonia from the electroreduction of nitrate, which features a remarkable 99.8% utilization of CO₂ capturing agent. Such a multipurpose process offers a sustainable route for the simultaneous removal of N wastes and streamlined CO₂ capturing and upgrading.

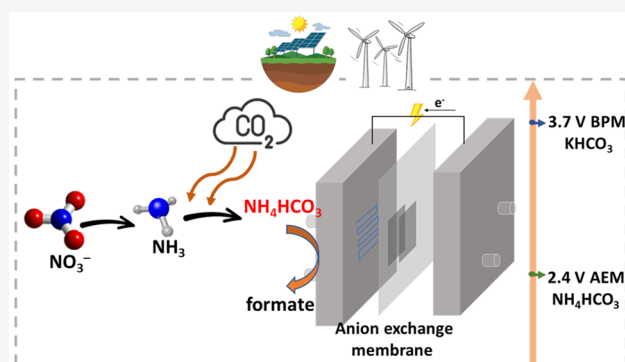

Reduction of the net CO₂ emissions to zero by 2050 is an urgent need for limiting global warming to a safe level.^{1–4} Powered by renewable electricity from solar or wind sources, CO₂ can be electrochemically converted into valuable chemicals and fuels (i.e., the CO₂ reduction reaction, or CO₂RR).^{1,5} However, CO₂ electrolyzers in most studies are fed with pressurized and purified CO₂ gas, production of which requires energy- and capital-intensive regeneration processes from the captured CO₂.^{6,7} Specifically, after capturing CO₂ from air or flue gases, the release of CO₂ is usually accomplished by heating the capturing media at 120–150 °C.^{8,9} Then, the collected CO₂ must be compressed into a pressurized container for storage and transportation before its utilization. Therefore, integrating CO₂ capture and conversion steps is vital to decreasing the energy costs and making the overall process sustainable.^{7,10}




One strategy is to convert CO₂ directly in its capture solutions upon its *in situ* release.⁷ In bipolar membrane (BPM)-based electrolyzers, aqueous bicarbonate—generated by absorbing CO₂ in KOH capture solution (RXN 1)—can

react with H⁺ produced by the BPM to form *in situ* CO₂ (i-CO₂) at the BPM-electrode interface (RXN 4), which can be subsequently converted into value-added products such as CO,^{11–15} formate,¹⁶ and CH₄.¹⁷ However, the performance of such bicarbonate electrolyzers is inferior to direct CO₂ electrolyzers fed with gaseous CO₂, largely due to the inadequate local *i*-CO₂ concentration.^{18,19} Besides, the metal cation bicarbonate electrolyzer has significantly higher electrical energy consumption, because the BPM requires an additional potential of 0.828 V (under standard conditions) for H⁺ generation by water dissociation upon large current densities,¹⁵ and BPM is thicker than conventional cation and anion exchange membranes (CEM and AEM).

Apart from the KOH solution, amines such as monoethanolamine (MEA) solution are commonly used for capturing CO₂ due to the facile kinetics of the formation of amine-CO₂ adducts (RXN 2).^{20–22} Conversion of the MEA-CO₂ adduct to CO has been reported in previous studies but only at low current densities (<50 mA cm⁻²).^{20,21,23} In addition to the

Received: October 4, 2022

Accepted: November 9, 2022

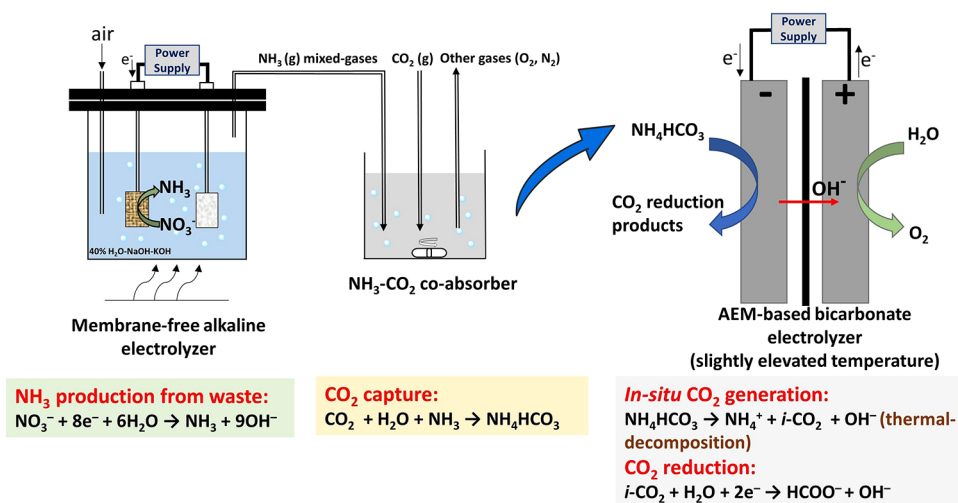Scheme 1. Schematic Illustration of the Integrated Process of CO₂ Capture and Utilization^a

^aThis process combines NH₃ production from NO₃⁻, waste CO₂ capture by coabsorption with NH₃, and production of value-added commodity chemicals from the bicarbonate electrolyzers. In the NO₃⁻ electrolyzer, the air was used as the carrier gas to purge NH₃-containing gases out of the reactor for its further capture of CO₂ in water: acid–base reaction between NH₃ and CO₂ (NH₃ + CO₂ + H₂O → NH₄HCO₃).

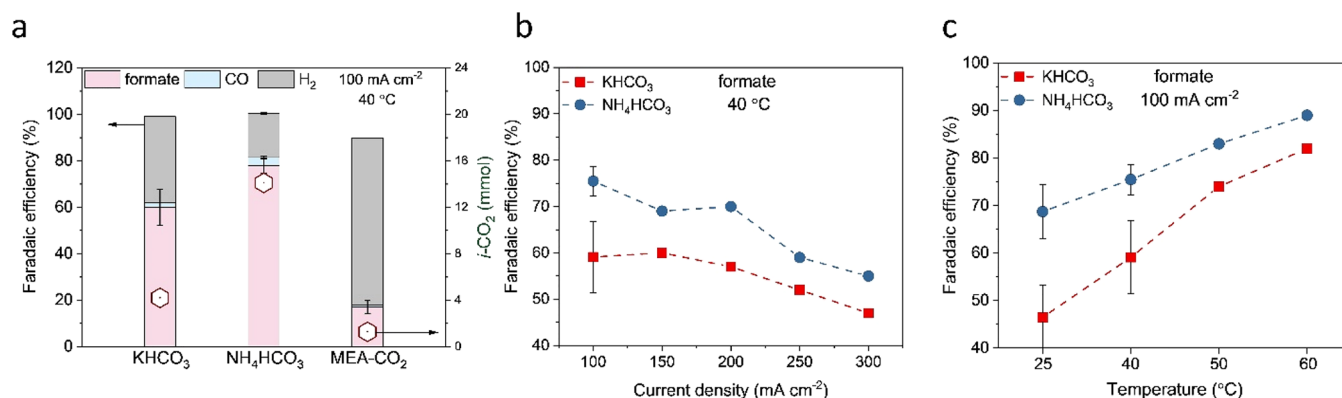



Figure 1. Electrochemical conversion of CO₂ capture solutions to formate. (a) Faradaic efficiency (left Y-axis) of products and the amount of *in situ* generated CO₂ (right Y-axis) during the electrolysis of different CO₂ capture solutions (2.5 M for all cases): KHCO₃, NH₄HCO₃, and MEA-CO₂. The electrolysis was performed at 40 °C for 30 min at a constant current density of 100 mA cm⁻². The MEA-CO₂ adduct was prepared by bubbling CO₂ for 30 min into the solution of MEA and then purging argon to remove dissolved CO₂. 2.5 M KCl was added to the MEA-CO₂ solution to increase its conductivity.²⁰ Comparison of formate faradaic efficiency with KHCO₃ and NH₄HCO₃ at (b) different current densities and (c) different cell temperatures during 30 min electrolysis. The catholyte volume was 40 mL for 100–150 mA cm⁻² and 120 mL for 200–300 mA cm⁻², respectively.

insufficient *i*-CO₂ concentration, the bulky carbamate (RNHCOO⁻) and ethanolammonium (RNH₃⁺) ions may hinder the mass transport at the electrode double layer, which limits the *i*-CO₂RR performance.


As a suitable alternative, CO₂ can be captured by ammonium (NH₄⁺) solution to form ammonia bicarbonate (NH₄HCO₃) (RXN 3).^{23,24} Compared to MEA, NH₃ has a higher CO₂-capturing capacity because it doubles the stoichiometric ratio of CO₂ to the capturing agent (RXN 2 and 3).²⁵ More importantly, release of CO₂ from NH₄HCO₃ requires much lower energy than that from MEA-CO₂ or KHCO₃, as illustrated by their decomposition temperatures: 36, 120, and 150 °C for NH₄HCO₃, MEA-CO₂, and KHCO₃, respectively.²⁶ The ease of CO₂ release from NH₄HCO₃ (RXN 5) is expected to provide sufficient *i*-CO₂ in the electrolyzer and facilitate *i*-CO₂RR with reduced energy input. Besides, the cost of NH₃ (13.5 USD per kmol²⁷) is much lower than that of KOH (86 USD per kmol²⁸) or MEA (92 USD per kmol²⁹),

and NH₃ as the CO₂ capture agent is less corrosive and less toxic as compared to KOH,²⁶ as shown in Supporting Information Note 1. Moreover, NH₃ can be readily produced by the electroreduction of NO₃⁻ or NO₂⁻ that is abundant in agricultural or industrial wastes.^{30–33} Using waste-derived NH₃ for CO₂ capture and conversion will simultaneously alleviate the environmental burdens of NO_x/NO₂⁻ and CO₂ by “fixing” them into stable and value-added chemical products (Scheme 1).^{34,35}

Conventional work: water dissociation driven in BPM electrolyzer



This work: thermal decomposition driven in AEM electrolyzer



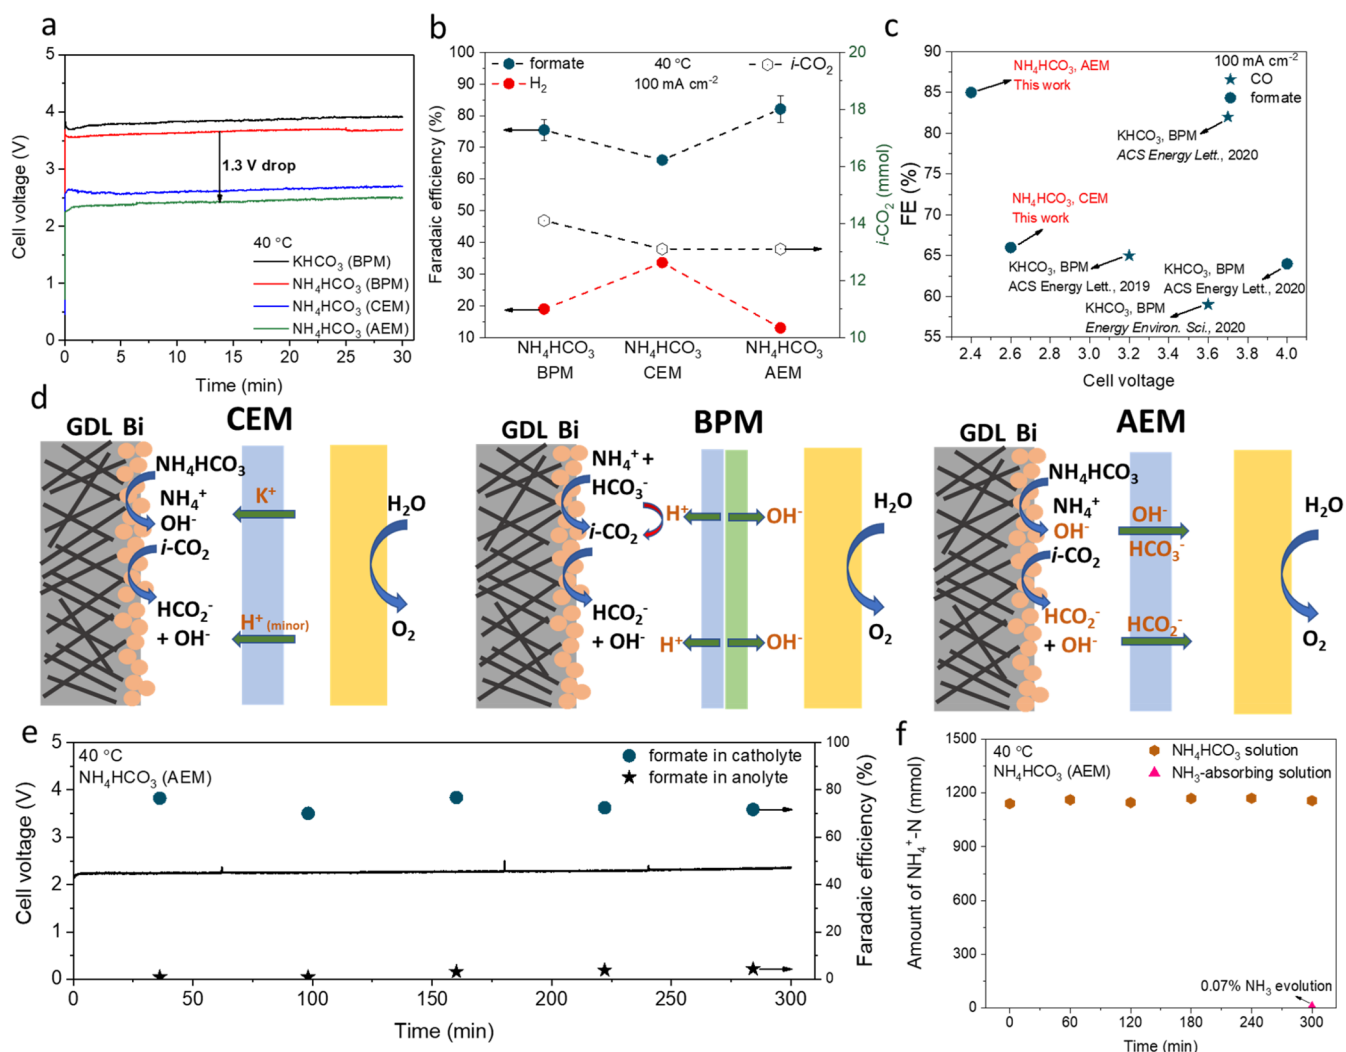


Figure 2. Conversion of NH_4HCO_3 in the electrolyzers with different membranes. (a) Cell voltage profile and (b) faradaic efficiency (left Y-axis) of products and the amount of *in situ* generated CO_2 (right Y-axis) for the electrolysis of KHCO_3 and NH_4HCO_3 with different membranes: BPM, CEM, and AEM. The electrolysis was performed at 40 °C for 30 min at a constant current density of 100 mA cm^{-2} . (c) Comparison of the cell voltage and the FE toward product (formate) in this work with the reported performances^{11,12,16,44} using KHCO_3 and BPM at 100 mA cm^{-2} . (d) Schematic illustration of the local environment at the cathode for the electrolyzers with NH_4HCO_3 feed when using different membranes. (e) Cell voltage profile and formate faradaic efficiency (for both catholyte and anolyte) for 5 h electrolysis in an AEM-based system at a cell temperature of 40 °C. (f) Amount of NH_4^+ in the NH_4HCO_3 solution and the acid absorbing solution.

One known obstacle to using NH_3 as the capture agent is its volatility, and it may escape from NH_3 solution during capture operation and handling.²⁶ Through system modeling and optimization, such as the advanced flash stripper process,^{36,37} both operational and economic feasibilities have been demonstrated for NH_3 -based CO_2 capture (chilled NH_3 process)^{38,39} from postcombustion streams. For example, a proposed two-stage adsorption process has reduced NH_3 slip by more than 50%, leading to the recovery of >99% of vaporized NH_3 .⁴⁰ The CO_2 -avoided cost has been reduced to US\$ 40.7/ton CO_2 for NH_3 -based CO_2 capture, which is 44% less than the MEA-based process (US\$ 75.1/ton CO_2).³⁶ Albeit the successful modeling of the capability of using NH_3 as the capture agent, the utilization of CO_2 captured media—the direct conversion of NH_4HCO_3 solution in the electrolyzers—has never been developed. Besides, the previous studies were limited to theoretically modeling the technical and economic capability of NH_3 -based CO_2 capture. A combined process for NH_3 -mediated CO_2 capture (with

NH_3 derived waste resources) and its direct utilization (conversion in electrolyzers) has not been achieved experimentally.

We first investigated the CO_2RR performance in a BPM-based electrolyzer with NH_4HCO_3 as the electrolyte and reactant. Formate was chosen as the target CO_2RR product in this study due to its known economic feasibility.^{5,41} Besides, recent work has proposed that ammonium formate is a safe and energy-dense electrochemical fuel with an energy density of 3.2 kWh/L , higher than that of formic acid and hydrogen.⁴² Electrodeposited bismuth (ED-Bi) on a carbon paper substrate was used as the CO_2RR catalyst.¹⁶ Scanning electron microscopy (SEM) images and an X-ray diffraction (XRD) pattern show the uniform deposition of metallic Bi on carbon paper (Figure S1). The electrolyzer with a zero-gap configuration consisted of the ED-Bi cathode, a BPM, and a piece of nickel foam as the anode. The catholyte and anolyte were supplied to their respective electrode compartment at an identical flow rate of 50 mL min^{-1} .

Figure 1a shows the comparison of *i*-CO₂RR performance at 40 °C with three kinds of CO₂-capturing solutions (2.5 M for all cases): NH₄HCO₃, KHCO₃, and MEA-CO₂. At 100 mA cm⁻², the faradaic efficiency (FE) of formate production was 75 ± 3% for NH₄HCO₃, much higher than that of KHCO₃ (59 ± 7%) and MEA-CO₂ (18 ± 3%). The main side reaction was the hydrogen evolution reaction (HER), and the FE toward CO production was less than 2%. Interestingly, the trend of FE toward formate is consistent with the amount of generated *i*-CO₂, which was determined by summing the amounts of CO₂ (evolved from the catholyte and detected by gas chromatography) and CO₂RR products generated during the electrolysis. The total *i*-CO₂ produced from NH₄HCO₃ was 3.4 or 10.8 times that of KHCO₃ or MEA-CO₂, respectively. The poor CO₂RR performance with MEA-CO₂ could be attributed to the bulky ions of MEA-CO₂ that inhibit *i*-CO₂ formation and transportation.²³ Furthermore, by comparing the results with the corresponding control cells without applied current (Table S1), we found the portion of produced *i*-CO₂ from thermal decomposition was 93% for NH₄HCO₃, much higher than that for KHCO₃ (52%), highlighting the ease of CO₂ release from NH₄HCO₃.

The CO₂RR performances of the systems with NH₄HCO₃ and KHCO₃ were further compared at different current densities ranging from 100 to 300 mA cm⁻² (Figure 1b) and cell temperatures from 25 to 60 °C (Figure 1c). The system with NH₄HCO₃ shows 10–20% higher formate-oriented FE than KHCO₃ under all tested conditions. Limited by the mass transport *i*-CO₂, the remaining FE attributed to the competing H₂ (major) and CO (minor, <2%) evolutions, which exhibited an opposite trend as compared to formate formation (Figure S2 and Table S2). At 100 mA cm⁻², the highest formate FE was 90% with NH₄HCO₃ at 60 °C, which is higher than the reported values in the bicarbonate electrolyzers for formate production.^{16,43}

Since the thermal decomposition dominates the production of *i*-CO₂ from NH₄HCO₃ (compared to the minor contribution from BPM), we further seek to remove the energy-consuming BPM in the electrolyzer to reduce the cell voltage. As shown in Figure 2a, substituting BPM with CEM or AEM indeed resulted in a decrease in the cell voltage from 3.7 to 2.4 V. Figure 2b compares the CO₂RR performances with NH₄HCO₃ feed using BPM, CEM, and AEM as the membrane. The *i*-CO₂ production only decreased slightly as the BPM was replaced by CEM or AEM due to the absence of H⁺ from BPM by water dissociation. In particular, when AEM is used, HER can be largely suppressed to 13% under a relatively high local pH (Figure 2d), resulting in a maximum formate FE of 82 ± 4% among the systems with three membranes. It is worth noting that we have taken into account the possible crossover of formate in three membrane cases, and the total FE is calculated by summing the formate concentration in both catholyte and anolyte. We did not observe any formate crossover in the CEM- or BPM-based electrolyzer, and the percentage of its crossover in the AEM-based system was 4.7% (Table S3).

The above results demonstrate that replacing BPM with AEM for the NH₄HCO₃ electrolyzer not only reduces the energy consumption significantly but also increases the FE toward formate due to the favorable microenvironments at the electrode-membrane interface. The results are in stark contrast to the reported bicarbonate electrolyzer with KHCO₃ feed,¹⁶ in which AEM showed a lower performance (<20% formate

FE) compared to BPM (62% formate FE): in that case, generation of *i*-CO₂ almost solely relies on the H⁺ supply from the membrane owing to the sluggishness of the thermal decomposition of KHCO₃. As shown in Figure 2c, the performance of our NH₄HCO₃ electrolyzer is superior to the state-of-the-art bicarbonate electrolyzers in terms of cell voltage and FE.

To investigate the volatility of NH₃ in the NH₄HCO₃-based electrolyzer, we conducted 5 h electrolysis in the AEM-based system and quantified NH₃ loss during electrolysis (photo in Figure S3). In theory, in the aqueous electrolyte with buffered NH₄HCO₃ solution, NH₄⁺ (aq) is the dominating species (detailed analysis in Supporting Information Note 2). We have experimentally tested the remained NH₄⁺ (aq) and lost NH₃ (g) by NMR (details in the Experimental section 4.1). Indeed, at 100 mA cm⁻², negligible NH₃ loss was observed in the electrolyzer, since the amount of NH₄⁺ (aq) was virtually unchanged in the NH₄HCO₃ solution at each hour interval and the escaped NH₃ was merely 0.07% (in NH₄⁺ equivalent) among the total NH₄HCO₃ detected in the NH₃-absorbing solution (Figure 2f). A very stable cell voltage was observed at 2.2 V throughout the entire electrolysis, and the total formate FE (catholyte + anolyte) varied in a narrow range between 74 and 79% (Figure 2e), both of which indicate the stable operation of the NH₄HCO₃ electrolysis with AEM. We observed a slight increase in the crossover of formate to anolyte during the 5 h electrolysis. This was attributed to the gradual increase in the concentration gradient of formate between the catholyte and anolyte. Even so, the total crossover was still <5% after 5 h. The SEM image (Figure S4) showed that the Bi catalyst maintained a nanosized structure, where the morphology of nanosheets was likely formed due to the *in situ* transformation from Bi nanoparticles under the electrolysis conditions.^{45,46}

To quantitatively compare the energy consumption of CO₂RR in different cell configurations, we analyzed the contributions to energy consumption for formic acid production at the current density of 100 mA cm⁻² (detailed calculation methods are described in the Supporting Information Note 3). As shown in Figure 3, for the systems with gaseous CO₂ feed (cases 1-i and 1-ii), the majority of energy consumption arises from the regeneration of CO₂, leading to higher total energy consumption than the systems fed with CO₂ capture solutions. Compared with other cases, conversion of MEA-CO₂ solution (case 2-ii) requires additional input of electrical energy owing to its low FE toward the desired product. The lowest energy consumption corresponded to the systems with NH₄HCO₃ feed following the order of AEM < CEM < BPM (cases 2-iii to 2-v), in accordance with our experimental data.

Apart from the ease of CO₂ release, another key advantage of NH₃-based CO₂ capture is that NH₃ can be sustainably produced from wastes. As NO₃⁻-N is a major form of pollutants in wastewater,⁴⁷ its electrochemical reduction offers a sustainable pathway to NH₃ as a waste-derived CO₂ capturing agent while alleviating the environmental impact of NO₃⁻ itself. For this purpose, we developed an integrated system consisting of an electrolyzer for NH₃ production and an absorbing unit for capturing CO₂ (Figure S5). The NH₃-producing electrolyzer was modified from the configuration in our previous work,⁴⁸ which contains a concentrated NaOH-KOH solution as the electrolyte and commercial nickel wire mesh as the electrode. The use of high alkalinity and elevated

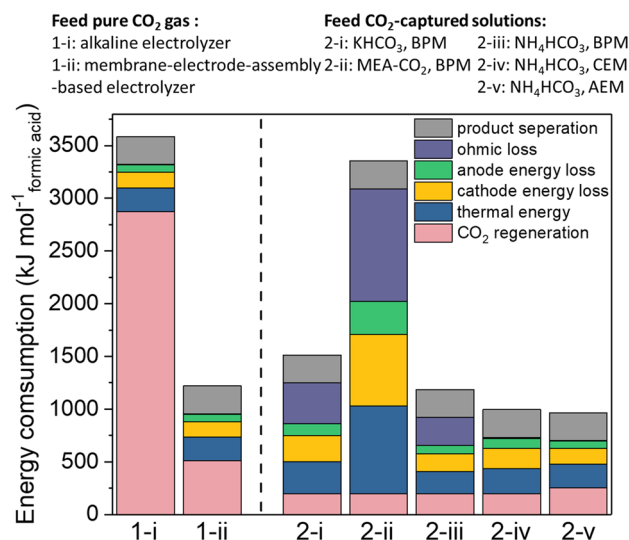


Figure 3. Analysis of the energy consumption for formic acid production from CO₂ electroreduction with different cell configurations. Cases 1-i and 1-ii correspond to the electrolyzers with gaseous CO₂ feed, and cases 2-i to 2-v correspond to the electrolyzers fed with CO₂ capture solutions.

temperature (80 °C) facilitated simultaneous NH₃ production and separation. NO₃⁻ reduction was performed under a continuous flow of N₂, which carries the produced NH₃ into a CO₂-saturated water solution cooled at 5 °C for NH₄HCO₃ formation.

Electrolysis was performed at 500 mA cm⁻² for 6 h with the supply of theoretical charge of NO₃⁻-to-NH₃ reaction (Figure S6), yielding a NH₄HCO₃ solution with a concentration of 1.21 M in the integrated NO₃⁻-to-NH₄HCO₃ system. For NO₃⁻ electrolysis, Figure 4a showed the FE of NH₃ production was 99.5% with the nearly complete conversion of NO₃⁻ (98.8%), while the FE of the side-product NO₂⁻ was 0.06%. For the CO₂ capturing unit, only a trace amount of NH₃ evolution (0.2% of the total NH₃ generated) was detected from its outlet, suggesting the high utilization of NH₃ (99.8%) as the on-site generated CO₂ capturing agent. The low boiling

point (-33.34 °C) of ammonia and its high vapor pressure in the alkaline environment as well as its high pK_a (acid-base reaction between NH₃ and CO₂ in water: NH₃ + CO₂ + H₂O → NH₄HCO₃) have guaranteed the simultaneous NH₃ generation, separation, and CO₂ capturing.⁴⁹

Further extending the electrolysis duration in a scaled-up reactor (see the details in the experimental section 3.2 and our recent work⁵⁰) led to the precipitation of solid NH₄HCO₃. The crystal phase of the separated solid was confirmed by comparing the XRD pattern with the commercial NH₄HCO₃ product (Figure 4b). In the BPM-based bicarbonate electrolyzer, electrolysis with the as-prepared NH₄HCO₃ showed a formate FE of 70%, which is close to the result with commercial NH₄HCO₃ (FE: 79%) under identical conditions. The slightly lower performance is possibly because of its slightly lower NH₄HCO₃ (91.4%, determined by ¹H NMR spectroscopy as shown in Figure 4c) due to the incorporation of water during its precipitation. Such a tandem process can effectively “seal” the waste nitrogen and waste carbon into NH₄HCO₃ as a stable, pure, and easy-to-handle chemical product. Benefiting from the highly reversible nature of NH₄HCO₃ formation and decomposition, waste N-derived NH₃ can “shuttle” the waste CO₂ for its electrochemical conversion by the CO₂ capture-release cycling process.

In summary, our study demonstrated that NH₄HCO₃ can serve as a unique, highly reactive platform that bridges CO₂ capturing and its electrochemical conversion via its facile *in situ* release. In this regard, NH₄HCO₃ has shown enhanced CO₂RR performance compared to KHCO₃ and MEA-CO₂, owing to its much lower energy requirement for releasing *i*-CO₂ within the electrolyzer. A mildly elevated temperature (e.g., 40 °C) was proven sufficient for generating adequate *i*-CO₂ for its efficient electroreduction with negligible ammonia loss, lifting the requirement of the energy-consuming BPM in the cell system and thus providing a proper solution to the high cell voltage of the prevailing electrolyzers for CO₂ capture solutions. The ammonium formate product from such a highly selective process can be used as an appealing candidate as an energy carrier.⁴² Further optimization of the electrode-membrane interface for enhanced CO₂RR activity, development of the reabsorption process to recycle the unreacted *i*-

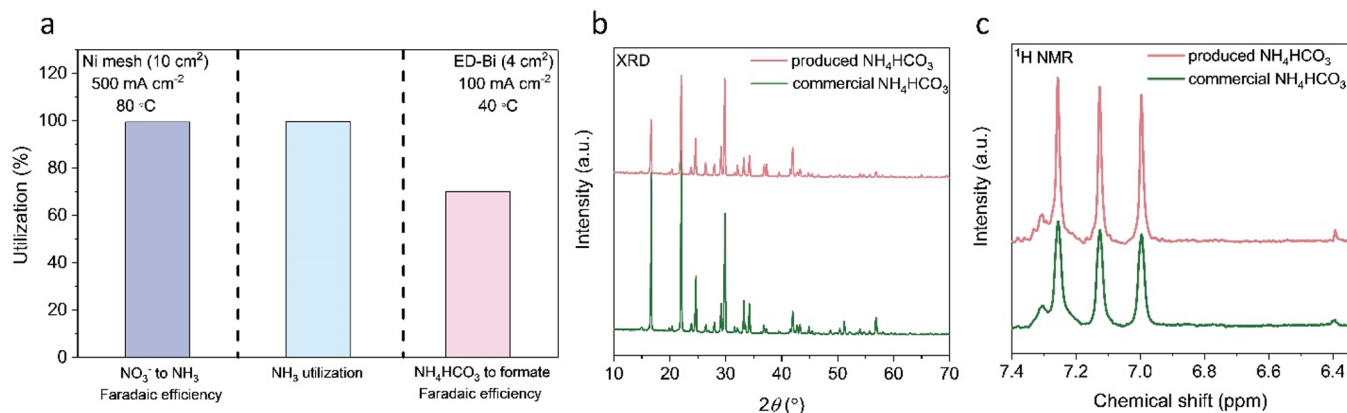


Figure 4. An integrated process combining CO₂ capture by NO₃⁻-derived NH₃ and formic acid production from NH₄HCO₃. (a) Utilization of the reaction ingredients for each individual process, including (1) electron utilization (faradaic efficiency) of the electrochemical NO₃⁻-to-NH₃ reaction; (2) utilization of the on-site generated CO₂ capturing agent (NH₃) for NH₄HCO₃ production; (3) electron utilization (faradaic efficiency) of the electrochemical formate production from the as-prepared NH₄HCO₃. The NH₄HCO₃ solution for electrolysis was prepared by dissolving 7.9 g of the NH₄HCO₃ (obtained by the reaction between NO₃⁻-derived NH₃ and CO₂) in 40 mL of deionized water. Comparison of the (b) XRD pattern and (c) ¹H NMR spectrum of the as-prepared NH₄HCO₃ and the commercial product.

CO₂ and NH₃ from the electrolyzer, and exploration of other CO₂RR products beyond formate will bring exciting new opportunities for realizing the “waste-to-wealth” goal under the sustainable energy framework.

■ ASSOCIATED CONTENT

SI Supporting Information

The Supporting Information is available free of charge at <https://pubs.acs.org/doi/10.1021/acseenergylett.2c02247>.

Experimental methods, structural/morphological characterization results, FE of products, and energy consumption estimations (PDF)

■ AUTHOR INFORMATION

Corresponding Author

Wenzhen Li – Department of Chemical and Biological Engineering, Iowa State University, Ames, Iowa 50011, United States; orcid.org/0000-0002-1020-5187; Email: wzli@iastate.edu

Authors

Hengzhou Liu – Department of Chemical and Biological Engineering, Iowa State University, Ames, Iowa 50011, United States

Yifu Chen – Department of Chemical and Biological Engineering, Iowa State University, Ames, Iowa 50011, United States

Jungkuk Lee – Department of Chemical and Biological Engineering, Iowa State University, Ames, Iowa 50011, United States

Shuang Gu – Department of Mechanical Engineering, Wichita State University, Wichita, Kansas 67260, United States; orcid.org/0000-0003-1532-0093

Complete contact information is available at: <https://pubs.acs.org/doi/10.1021/acseenergylett.2c02247>

Notes

The authors declare no competing financial interest.

■ ACKNOWLEDGMENTS

This work was supported by the USDA-NIFA 20216702134650 and NSF CHE2036944 grants. W. Li acknowledges his Herbert L. Stiles Faculty Fellowship and IEC competitive fund (20-IEC-019).

■ REFERENCES

- (1) Nitopi, S.; Bertheussen, E.; Scott, S. B.; Liu, X.; Engstfeld, A. K.; Horch, S.; Seger, B.; Stephens, I. E.; Chan, K.; Hahn, C.; et al. Progress and perspectives of electrochemical CO₂ reduction on copper in aqueous electrolyte. *Chem. Rev.* **2019**, *119* (12), 7610–7672.
- (2) Pachauri, R. K.; Allen, M. R.; Barros, V. R.; Broome, J.; Cramer, W.; Christ, R.; Church, J. A.; Clarke, L.; Dahe, Q.; Dasgupta, P.; et al. *Climate change 2014: synthesis report. Contribution of Working Groups I, II and III to the fifth assessment report of the Intergovernmental Panel on Climate Change*; IPCC, 2014.
- (3) Sullivan, I.; Goryachev, A.; Digdaya, I. A.; Li, X.; Atwater, H. A.; Vermaas, D. A.; Xiang, C. Coupling electrochemical CO₂ conversion with CO₂ capture. *Nat. Catal.* **2021**, *4* (11), 952–958.
- (4) Rogelj, J.; Huppmann, D.; Krey, V.; Riahi, K.; Clarke, L.; Gidden, M.; Nicholls, Z.; Meinshausen, M. A new scenario logic for the Paris Agreement long-term temperature goal. *Nature* **2019**, *573* (7774), 357–363.
- (5) De Luna, P.; Hahn, C.; Higgins, D.; Jaffer, S. A.; Jaramillo, T. F.; Sargent, E. H. What would it take for renewably powered electrosynthesis to displace petrochemical processes? *Science* **2019**, *364* (6438), eaav3506.
- (6) Keith, D. W.; Holmes, G.; St. Angelo, D.; Heide, K. A process for capturing CO₂ from the atmosphere. *Joule* **2018**, *2* (8), 1573–1594.
- (7) Welch, A. J.; Dunn, E.; DuChene, J. S.; Atwater, H. A. Bicarbonate or carbonate processes for coupling carbon dioxide capture and electrochemical conversion. *ACS Energy Lett.* **2020**, *5* (3), 940–945.
- (8) Boot-Handford, M. E.; Abanades, J. C.; Anthony, E. J.; Blunt, M. J.; Brandani, S.; Mac Dowell, N.; Fernández, J. R.; Ferrari, M.-C.; Gross, R.; Hallett, J. P.; et al. Carbon capture and storage update. *Energy Environ. Sci.* **2014**, *7* (1), 130–189.
- (9) Haszeldine, R. S. Carbon capture and storage: how green can black be? *Science* **2009**, *325* (5948), 1647–1652.
- (10) Pérez-Gallent, E.; Vankani, C.; Sánchez-Martínez, C.; Anastasopol, A.; Goetheer, E. Integrating CO₂ Capture with Electrochemical Conversion Using Amine-Based Capture Solvents as Electrolytes. *Ind. Eng. Chem. Res.* **2021**, *60* (11), 4269–4278.
- (11) Lees, E. W.; Goldman, M.; Fink, A. G.; Dvorak, D. J.; Salvatore, D. A.; Zhang, Z.; Loo, N. W.; Berlinguette, C. P. Electrodes designed for converting bicarbonate into CO. *ACS Energy Lett.* **2020**, *5* (7), 2165–2173.
- (12) Zhang, Z.; Lees, E. W.; Habibzadeh, F.; Salvatore, D. A.; Ren, S.; Simpson, G. L.; Wheeler, D. G.; Liu, A.; Berlinguette, C. P. Porous metal electrodes enable efficient electrolysis of carbon capture solutions. *Energy Environ. Sci.* **2022**, *15* (2), 705–713.
- (13) Lees, E. W.; Bui, J. C.; Song, D.; Weber, A. Z.; Berlinguette, C. P. Continuum Model to Define the Chemistry and Mass Transfer in a Bicarbonate Electrolyzer. *ACS Energy Lett.* **2022**, *7*, 834–842.
- (14) Yang, K.; Li, M.; Subramanian, S.; Blommaert, M. A.; Smith, W. A.; Burdyny, T. Cation-Driven Increases of CO₂ Utilization in a Bipolar Membrane Electrode Assembly for CO₂ Electrolysis. *ACS Energy Lett.* **2021**, *6* (12), 4291–4298.
- (15) Blommaert, M. A.; Aili, D.; Tufa, R. A.; Li, Q.; Smith, W. A.; Vermaas, D. A. Insights and Challenges for Applying Bipolar Membranes in Advanced Electrochemical Energy Systems. *ACS Energy Lett.* **2021**, *6* (7), 2539–2548.
- (16) Li, T.; Lees, E. W.; Zhang, Z.; Berlinguette, C. P. Conversion of bicarbonate to formate in an electrochemical flow reactor. *ACS Energy Lett.* **2020**, *5* (8), 2624–2630.
- (17) Lees, E. W.; Liu, A.; Bui, J. C.; Ren, S.; Weber, A. Z.; Berlinguette, C. P. Electrolytic Methane Production from Reactive Carbon Solutions. *ACS Energy Lett.* **2022**, *7*, 1712–1718.
- (18) Kas, R.; Yang, K.; Yewale, G. P.; Crow, A.; Burdyny, T.; Smith, W. A. Modeling the Local Environment within Porous Electrode during Electrochemical Reduction of Bicarbonate. *Ind. Eng. Chem. Res.* **2022**, *61*, 10461.
- (19) Kim, D.; Choi, W.; Lee, H. W.; Lee, S. Y.; Choi, Y.; Lee, D. K.; Kim, W.; Na, J.; Lee, U.; Hwang, Y. J.; et al. Electrocatalytic Reduction of Low Concentrations of CO₂ Gas in a Membrane Electrode Assembly Electrolyzer. *ACS Energy Lett.* **2021**, *6* (10), 3488–3495.
- (20) Lee, G.; Li, Y. C.; Kim, J.-Y.; Peng, T.; Nam, D.-H.; Sedighian Rasouli, A.; Li, F.; Luo, M.; Ip, A. H.; Joo, Y.-C.; et al. Electrochemical upgrade of CO₂ from amine capture solution. *Nat. Energy* **2021**, *6* (1), 46–53.
- (21) Chen, L.; Li, F.; Zhang, Y.; Bentley, C. L.; Horne, M.; Bond, A. M.; Zhang, J. Electrochemical reduction of carbon dioxide in a monoethanolamine capture medium. *ChemSusChem* **2017**, *10* (20), 4109–4118.
- (22) Rochelle, G. T. Amine scrubbing for CO₂ capture. *Science* **2009**, *325* (5948), 1652–1654.
- (23) Kim, J. H.; Jang, H.; Bak, G.; Choi, W.; Yun, H.; Lee, E.; Kim, D.; Kim, J.; Lee, S. Y.; Hwang, Y. J. Insensitive cation effect on single-atom Ni catalyst allows selective electrochemical conversion of captured CO₂ in universal media. *Energy Environ. Sci.* **2022**, *15*, 4301.

- (24) Zhao, B.; Su, Y.; Tao, W.; Li, L.; Peng, Y. Post-combustion CO₂ capture by aqueous ammonia: A state-of-the-art review. *Int. J. Greenh. Gas Control.* **2012**, *9*, 355–371.
- (25) Shakerian, F.; Kim, K.-H.; Szulejko, J. E.; Park, J.-W. A comparative review between amines and ammonia as sorptive media for post-combustion CO₂ capture. *Appl. Energy* **2015**, *148*, 10–22.
- (26) Wang, F.; Zhao, J.; Miao, H.; Zhao, J.; Zhang, H.; Yuan, J.; Yan, J. Current status and challenges of the ammonia escape inhibition technologies in ammonia-based CO₂ capture process. *Appl. Energy* **2018**, *230*, 734–749.
- (27) Echemi.com. Ammonia Market Price and Analysis. Retrieved June 11, 2022 from https://www.echemi.com/productsInformation/pid_Rock19411-ammonia.html.
- (28) Echemi.com. Potassium hydroxide Market Price and Analysis. Retrieved June 11, 2022 from <https://www.echemi.com/productsInformation/pd20150901020-potassium-hydroxide.html>.
- (29) Echemi.com. Ethanolamine Market Price and Analysis. Retrieved June 11, 2022 from https://www.echemi.com/productsInformation/pid_Seven5556-ethanolamine.html.
- (30) Liu, H.; Park, J.; Chen, Y.; Qiu, Y.; Cheng, Y.; Srivastava, K.; Gu, S.; Shanks, B. H.; Roling, L. T.; Li, W. Electrocatalytic nitrate reduction on oxide-derived silver with tunable selectivity to nitrite and ammonia. *ACS Catal.* **2021**, *11* (14), 8431–8442.
- (31) Daiyan, R.; Tran-Phu, T.; Kumar, P.; Iputera, K.; Tong, Z.; Leverett, J.; Khan, M. H. A.; Asghar Esmailpour, A.; Jalili, A.; Lim, M.; et al. Nitrate reduction to ammonium: from CuO defect engineering to waste NO_x-to-NH₃ economic feasibility. *Energy Environ. Sci.* **2021**, *14* (6), 3588–3598.
- (32) Kwon, Y.-i.; Kim, S. K.; Kim, Y. B.; Son, S. J.; Nam, G. D.; Park, H. J.; Cho, W.-C.; Yoon, H. C.; Joo, J. H. Nitric oxide utilization for ammonia production using solid electrolysis cell at atmospheric pressure. *ACS Energy Lett.* **2021**, *6* (12), 4165–4172.
- (33) Kim, D.; Shin, D.; Heo, J.; Lim, H.; Lim, J.-A.; Jeong, H. M.; Kim, B.-S.; Heo, I.; Oh, I.; Lee, B.; et al. Unveiling Electrode–Electrolyte Design-Based NO Reduction for NH₃ Synthesis. *ACS Energy Lett.* **2020**, *5* (11), 3647–3656.
- (34) van Langevelde, P. H.; Katsounaros, I.; Koper, M. T. Electrocatalytic nitrate reduction for sustainable ammonia production. *Joule* **2021**, *5* (2), 290–294.
- (35) Wang, Y.; Wang, C.; Li, M.; Yu, Y.; Zhang, B. Nitrate electroreduction: mechanism insight, in situ characterization, performance evaluation, and challenges. *Chem. Soc. Rev.* **2021**, *50* (12), 6720–6733.
- (36) Jiang, K.; Li, K.; Yu, H.; Chen, Z.; Wardhaugh, L.; Feron, P. Advancement of ammonia based post-combustion CO₂ capture using the advanced flash stripper process. *Appl. Energy* **2017**, *202*, 496–506.
- (37) Jiang, K.; Yu, H.; Yu, J.; Li, K. Advancement of ammonia-based post-combustion CO₂ capture technology: Process modifications. *Fuel Process. Technol.* **2020**, *210*, 106544.
- (38) Hanak, D. P.; Biliyok, C.; Manovic, V. Efficiency improvements for the coal-fired power plant retrofit with CO₂ capture plant using chilled ammonia process. *Appl. Energy* **2015**, *151*, 258–272.
- (39) Li, K.; Yu, H.; Yan, S.; Feron, P.; Wardhaugh, L.; Tade, M. Technoeconomic assessment of an advanced aqueous ammonia-based postcombustion capture process integrated with a 650-MW coal-fired power station. *Environ. Sci. Technol.* **2016**, *50* (19), 10746–10755.
- (40) Li, K.; Yu, H.; Feron, P.; Tade, M.; Wardhaugh, L. Technical and energy performance of an advanced, aqueous ammonia-based CO₂ capture technology for a 500 MW coal-fired power station. *Environ. Sci. Technol.* **2015**, *49* (16), 10243–10252.
- (41) Shin, H.; Hansen, K. U.; Jiao, F. Techno-economic assessment of low-temperature carbon dioxide electrolysis. *Nat. Sustain.* **2021**, *4* (10), 911–919.
- (42) Schiffer, Z. J.; Biswas, S.; Manthiram, K. Ammonium Formate as a Safe, Energy-Dense Electrochemical Fuel Ionic Liquid. *ACS Energy Lett.* **2022**, *7*, 3260–3267.
- (43) Min, X.; Kanan, M. W. Pd-catalyzed electrohydrogenation of carbon dioxide to formate: high mass activity at low overpotential and identification of the deactivation pathway. *J. Am. Chem. Soc.* **2015**, *137* (14), 4701–4708.
- (44) Li, Y. C.; Lee, G.; Yuan, T.; Wang, Y.; Nam, D.-H.; Wang, Z.; Garcia de Arquer, F. P.; Lum, Y.; Dinh, C.-T.; Voznyy, O.; et al. CO₂ electroreduction from carbonate electrolyte. *ACS Energy Lett.* **2019**, *4* (6), 1427–1431.
- (45) Lee, J.; Liu, H.; Chen, Y.; Li, W. Bismuth Nanosheets Derived by In Situ Morphology Transformation of Bismuth Oxides for Selective Electrochemical CO₂ Reduction to Formate. *ACS Appl. Mater. Interfaces.* **2022**, *14* (12), 14210–14217.
- (46) Han, N.; Wang, Y.; Yang, H.; Deng, J.; Wu, J.; Li, Y.; Li, Y. Ultrathin bismuth nanosheets from in situ topotactic transformation for selective electrocatalytic CO₂ reduction to formate. *Nat. Commun.* **2018**, *9* (1), 1320.
- (47) Temkin, A.; Evans, S.; Manidis, T.; Campbell, C.; Naidenko, O. V. Exposure-based assessment and economic valuation of adverse birth outcomes and cancer risk due to nitrate in United States drinking water. *Environ. Res.* **2019**, *176*, 108442.
- (48) Chen, Y.; Liu, H.; Ha, N.; Licht, S.; Gu, S.; Li, W. Revealing nitrogen-containing species in commercial catalysts used for ammonia electrosynthesis. *Nat. Catal.* **2020**, *3* (12), 1055–1061.
- (49) National Center for Biotechnology Information. PubChem Compound Summary for CID 222, Ammonia. Retrieved May 23, 2022 from <https://pubchem.ncbi.nlm.nih.gov/compound/Ammonia>.
- (50) Chen, Y.; Ammari-Azar, O.; Liu, H.; Lee, J.; Xi, Y.; Castellano, M.; Gu, S.; Li, W. An integrated sustainable process for economically upcycling waste nitrogen enabled by low-concentration nitrate electroreduction and high-performance ammonia electrosynthesis. *Energy Environ. Sci.* Under Revision.